

Under counter – fridge only

Standard drawer + cover top



Applications

- Bulk storage right at the point of use
- Range of finished height units available, to suit a wide variety of spaces in the kitchen
- Unique patented Low Velocity Cooling keeps food fresher for longer

Storage Capacity

Gastronorm (GN) Pans
4 x 1/1 GN
100 mm Deep
or equivalent (per Drawer)


Maximum Weight
40 kg of Food (per Drawer)

Volume
86 Litres (per Drawer)

Hydrocarbon
R600a Refrigerant

A+ Fridge
Drawer

'A+' Energy Rating
(Consumption 239
kWh/annum)

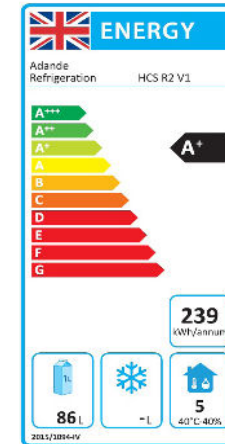

Climate Testing

Tested to **Climate Class 4**
(30°C & 55% relative humidity)
for temperature and energy
consumption and to **Climate
Class 5** (40°C & 40% relative
humidity) for temperature

Electrical

Mains Supply
230 Vac 50 Hz

Power Socket (included)
Correct 2 or 3 Pin Plug
fitted for each country

Mains Lead (included)
2 Metre Coiled Lead

+15°C ↔ 0°C
❄️ ❄️ ❄️ ❄️ ❄️ ❄️


Options

UNDER COUNTER + COVER TOP (T)	High castor base (HC)		Standard castor base (C)		Small castor base (SC)		Rollers & feet base (R)		Small rollers & feet base (SR)		Locking roller base (L)		Small locking roller base (SL)	
Finished height	565 mm	HCS1/HCT	494 mm	HCS1/CT	473 mm	HCS1/SCT	449 mm	HCS1/RT	439 mm	HCS1/SRT	449 mm	HCS1/LT	439 mm	HCS1/SLT
Load-bearing capacity	0 kg		0 kg		0 kg		0 kg		0 kg		0 kg		0 kg	

For full options please see our [Drawer Customising](#) and [Accessories](#) pages


Plan View

Under counter (HCS1)
With open drawer

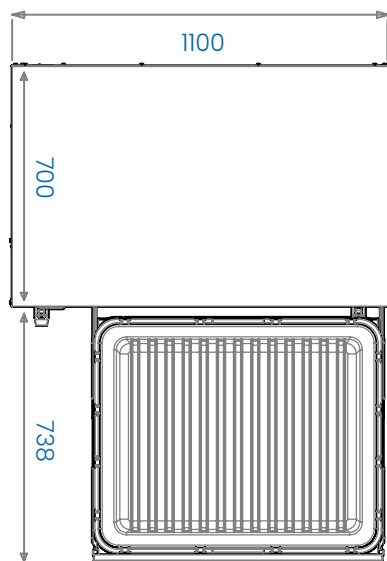

Elevation

Under counter (HCS1)
Standard castors (C)
Cover top (T)
HCS1/CT

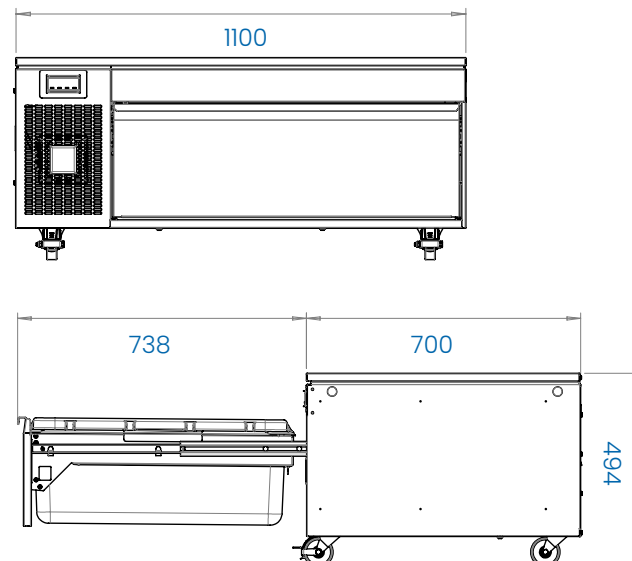

Tops



Drawer Module



Base

