Bulk storage unit

Shallow drawers + solid worktop



Applications

Hydrocarbon

R600a Refrigerant

Shallow drawer

'B' Energy Rating

in Freezer Mode

'A' Energy Rating in Fridge Mode

(Consumption 325 kWh/annum)

- Provides back up storage, close to the point of use, for maximum efficiency during busy service periods.
- With our Low Velocity Cooling system, food can be packed into the drawer without leaving any air gaps - there are no 'hot-spots' in an Adande Drawer.
- On request, Adande units can be arranged in mixed configurations, combining Multi-Temperature with Fridge Only Drawer.

Storage Capacity

Gastronorm (GN) Pans 4 x 1/1 GN 75 mm Deep or equivalent (per Drawer)

Maximum Weight 30 kg of Food (per Drawer)

Volume 65 Litres (per Drawer)

Climate Testing

Tested to **Climate Class 4** (30°C & 55% relative humidity) for temperature and energy consumption and to **Climate Class 5** (40°C & 40% relative humidity) for temperature

Electrical

Mains Supply 230 Vac 50 Hz

Power Socket (included) Correct 2 or 3 Pin Plug fitted for each country

Mains Lead (included) 2 Metre Coiled Lead

Adande Refrigeration VLS R2 V1









Options

SHALLOW DEPTH DRAWER UNITS + COVER TOP (T)	Standard castor base (C)		SHALLOW DEPTH DRAWER UNITS + SOLID WORKTOP (W)	Standard castor base (C)	
Finished height	1114 mm	VLS3/CT	Finished height	1123 mm	VLS3/CW
Load-bearing capacity	0 kg		Load-bearing capacity	155 kg	


For full options please see our Drawer Customising and Accessories pages


Plan View

Elevation

Bulk storage units Shallow depth drawers (VLS3) With open drawer Bulk store - shallow depth 3 drawer Fridge to freezer unit (VLS3) Standard castors (C) Cover top (T) VLS3/CT





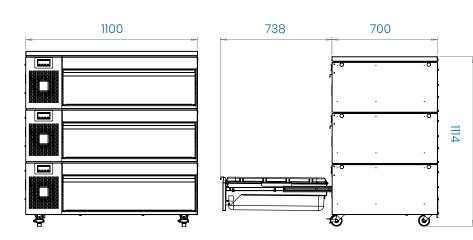

Three Drawer Module

Base



C 97 mm VLS3 1016 mm